

B...

Luxury Vinyl Tiles Collections



Belgotex®



Blackbutt

--- Davenport 3mm

These latest colour and texture trends are not just for show, they are backed up by a 0.55mm wear layer which means it will perform in heavy commercial areas as well as looking great in any trendy home.

3mm x 0.55mm
L 122cm x W 18.4cm

Kensington | Maple
Davenport | Hickory



Kensington | Magnolia
Davenport | Peanut



Kensington | Bleached Oak
Davenport | Gabon Nut

Gabon Nut




Antique Oak



Peanut



Blackbutt

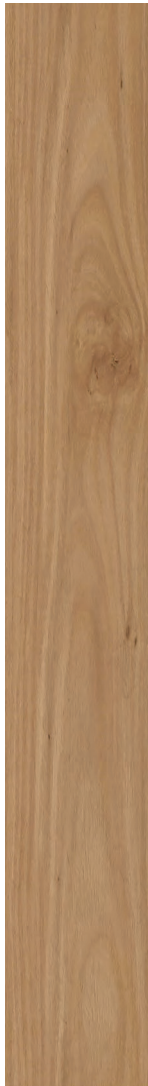

Spotted Gum



Hickory



Chilean Hazel



Blackwood



Kensington 5mm

This sophisticated range of colours and textures allows the space you are working with to be brought to life. The contemporary tones allow for a diverse clientele that has always wanted to impress.


5mm x 0.55mm
L 122cm x W 18.4cm

Kensington | Rosewood

Kensington | Ash
Davenport | Antique Oak



Kensington Construction

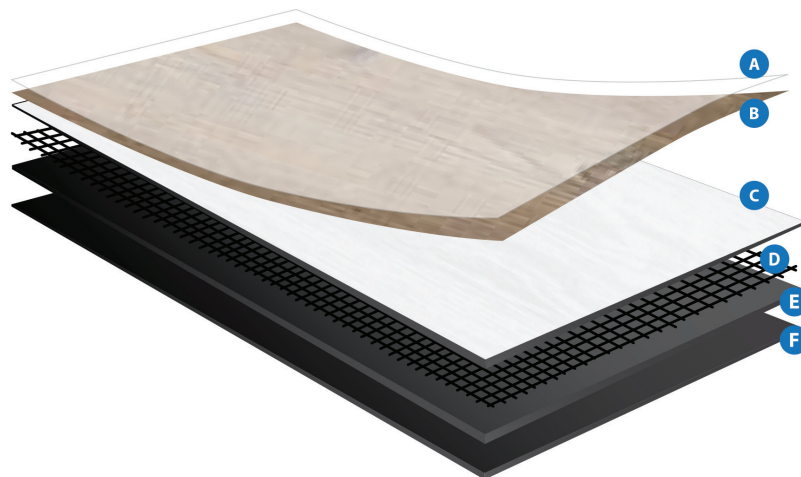

Structure

A) Wear Layer

Antibacterial
UV protective coating
Slip-resistant coating
Easy cleaning
100% water-resistant

B) Decorative Paper

Unique Designs

C) Virgin PVC Layer

Textured virgin PVC layer

D) Stability Layer

Fibreglass scrim for stability

E) Stability/Backing Layer

Sound absorbing quality
Stable and indentation resistant

F) Stability Layer

Bleached Oak



Ash



Magnolia



Blackbutt



Spotted Gum



Maple



Rosewood




Smoked Ebony





Spotted Gum

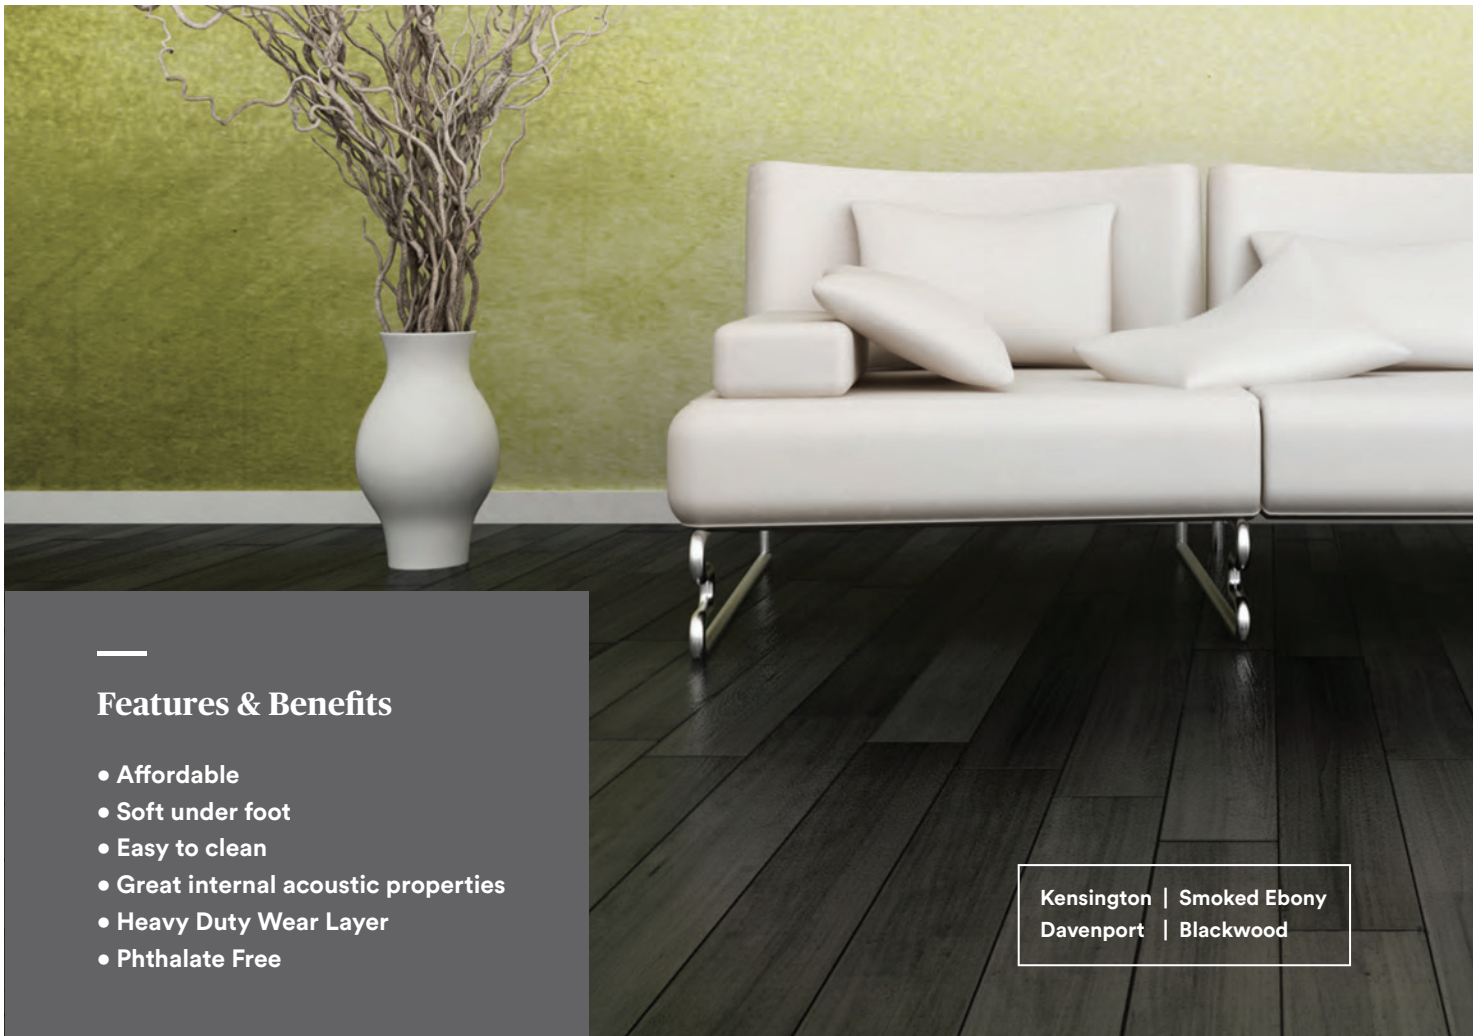

Features & Benefits

- Affordable
- Soft under foot
- Easy to clean
- Great internal acoustic properties
- Heavy Duty Wear Layer
- Phthalate Free

Kensington | Smoked Ebony
Davenport | Blackwood

	Davenport	Kensington
Installation	Dry Back (Stick-down)	Dry Back (Recommended Stick-down)
Application	Heavy Commercial	Heavy Commercial
Thickness & Wear Layer	3mm x 0.55mm	5mm x 0.55mm
Fire Resistance	Pass	Pass
Stain & Chemical Resistance	Excellent (EN 423)	Excellent (EN 423)
Overall Thickness	3mm	5mm
Plank Size	184.2mm x 1219.2mm	184.2mm x 1219.2mm
Quantity per Box	3.37m2 /ctn	2.25m2 /ctn
Number of Planks per Box	15	10
Abrasion Resistance	Group T (EN 660)	Group T (EN 660)
Slip Resistance	> 0.3 (EN 13893)	> 0.3 (EN 13893)
VOC Tested	Pass	Pass
Castor Chair	Pass (EN 425) (use soft non-staining wheels)	Pass (EN 425) (use soft non-staining wheels)